







VT 150E00

for double action heavy-duty and outer glass doors up to 150 kg

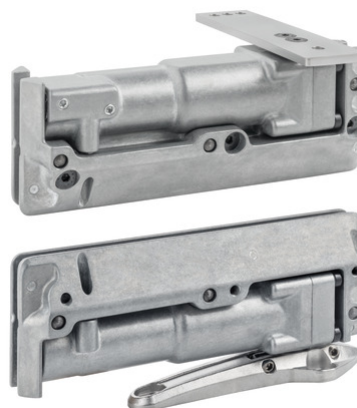

Product features

- hydraulic top and bottom hinge
- for double action outer doors that are protected from severe weather conditions
- integrated brake
- with closing speed adjustment
- with final latch adjustment
- hold open function at + 90° and - 90°
- automatic closing from + 80° and - 80°
- version without cover caps

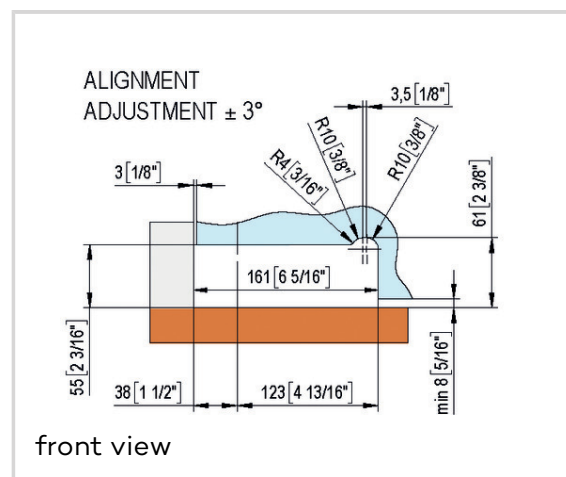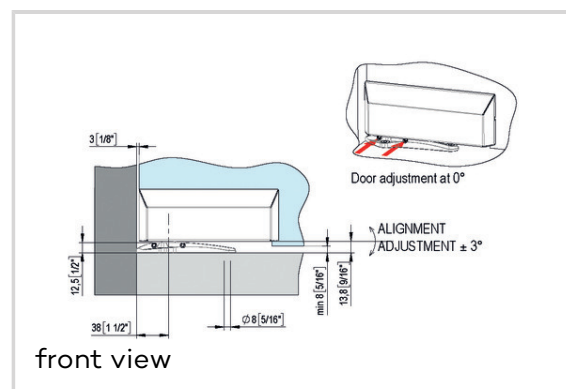

Technical data

Property	Value
Load capacity	150,0 kg
Opening angle	+/- 90°
Hold open	+ 90°, - 90°
Automatic closing	+ 80°, - 80°
Glass thickness	8 - 19,5 mm

VERTO - VT 150E00

Temperature range	- 10,0°C to + 50,0°C
Max. door width	1200,0 mm

Notes

The angle for the start of self-closing can vary by $\pm 5^\circ$ depending on external factors and the door format in the usual fields of application.

For installations in particular environments or climate (eg. wet, acid, saline) consult sales office first.


Cover caps to be ordered separately.

Combinations


VT 150E10 C
VT 150E30 C

Item versions

Finish	raw (CO 000)
VPE	pack of 1
DIN	DIN right and left hand
Article number	150E00
EAN	8056895001242

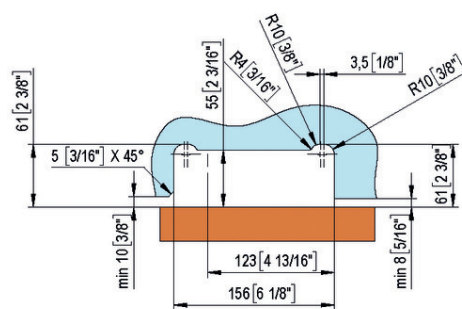

front view

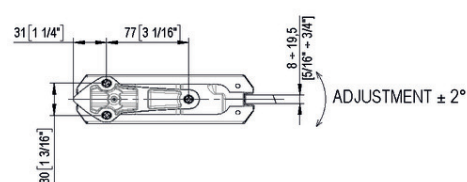


cross section



ALIGNMENT
ADJUSTMENT $\pm 2^\circ$

front view

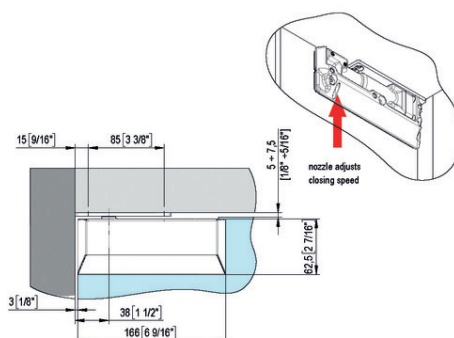

front view

VERTO - VT 150E00

